

FIG. 1

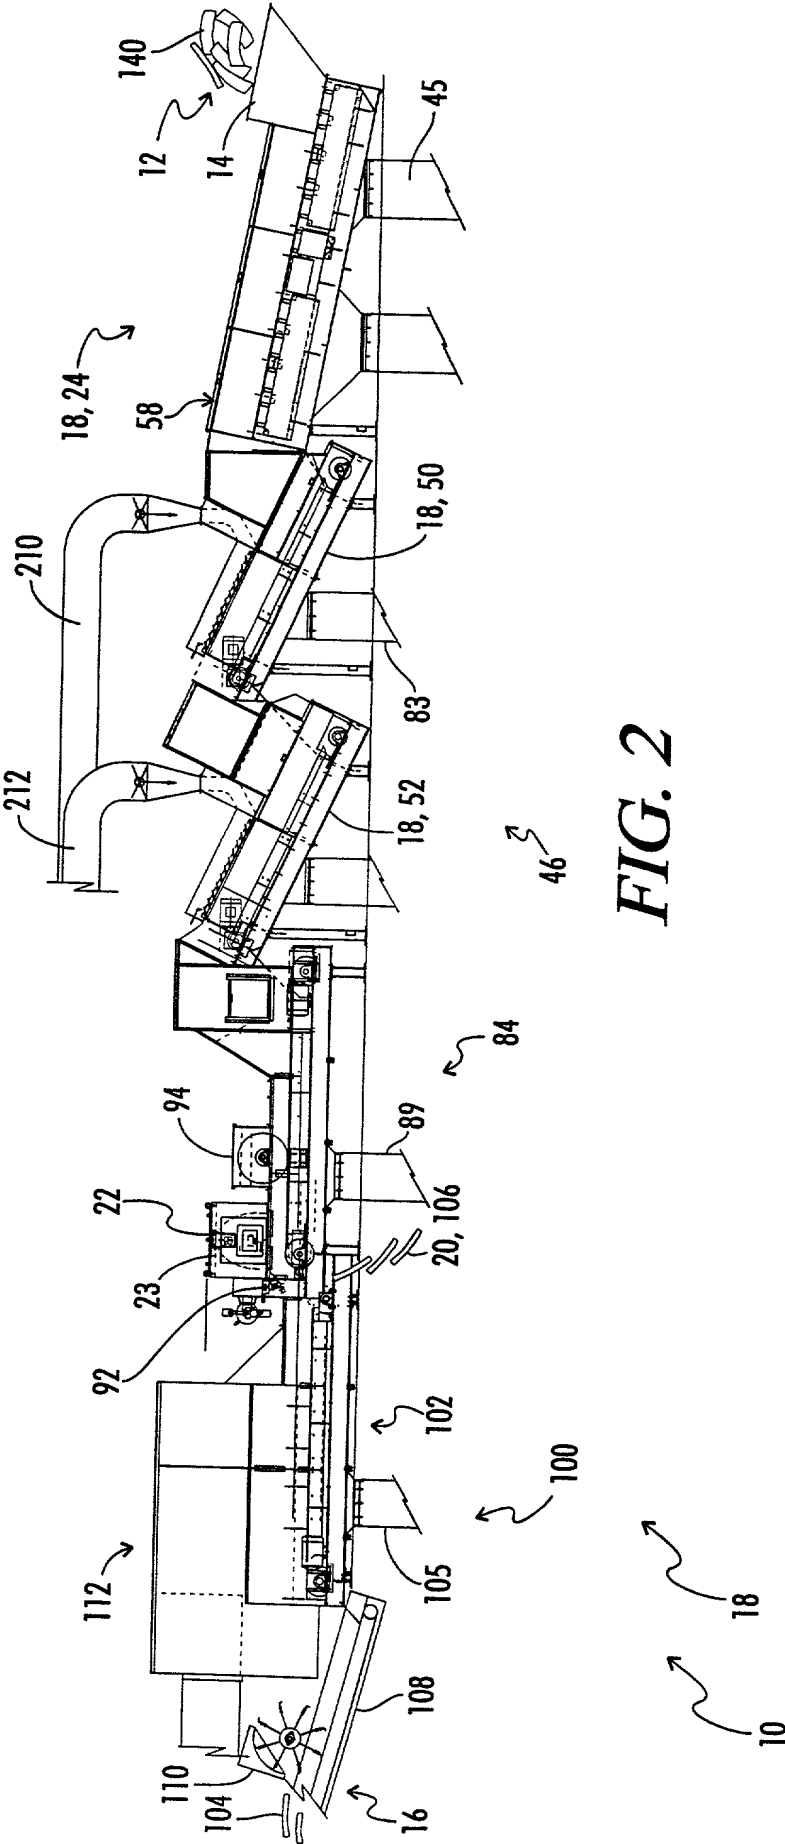


FIG. 2

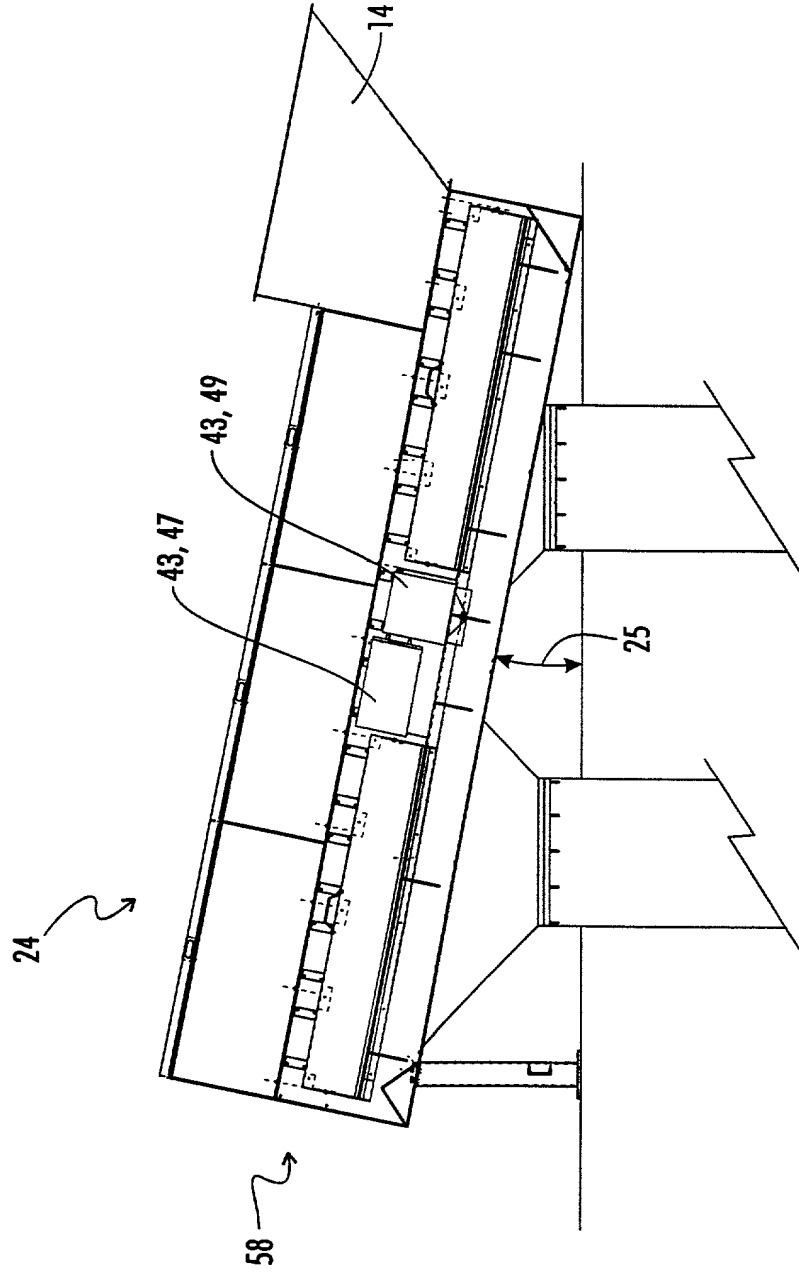


FIG. 3

+

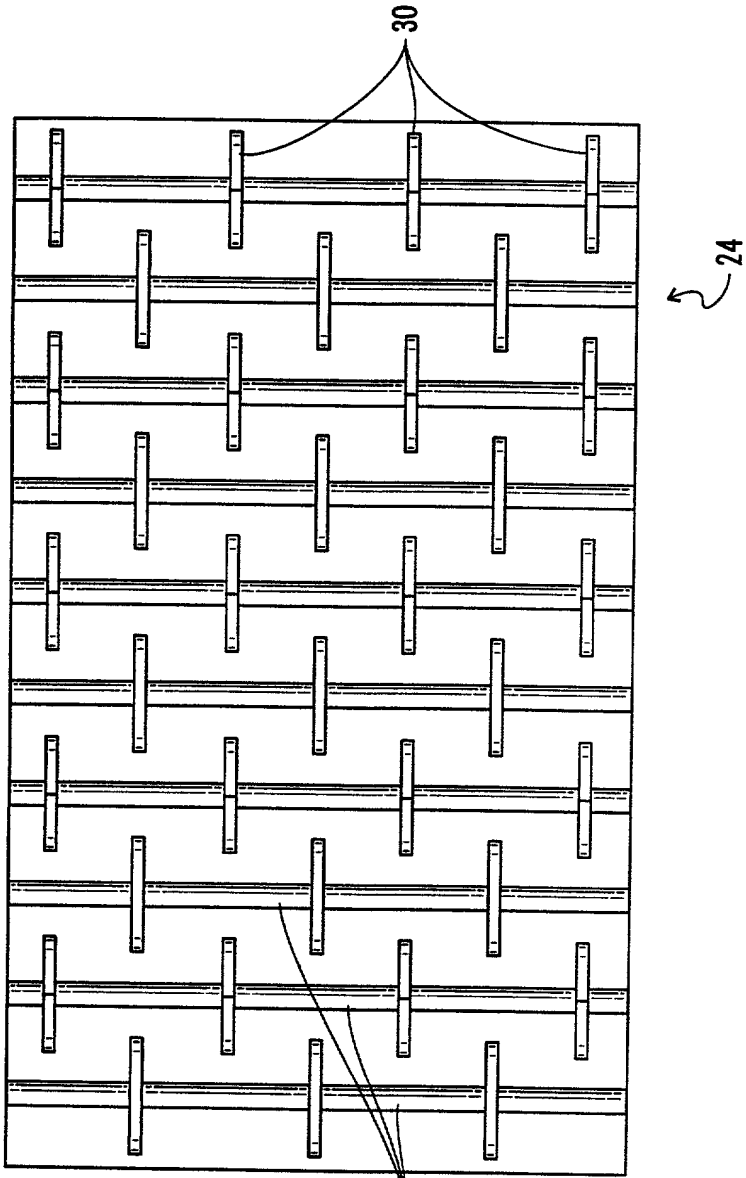


FIG. 4

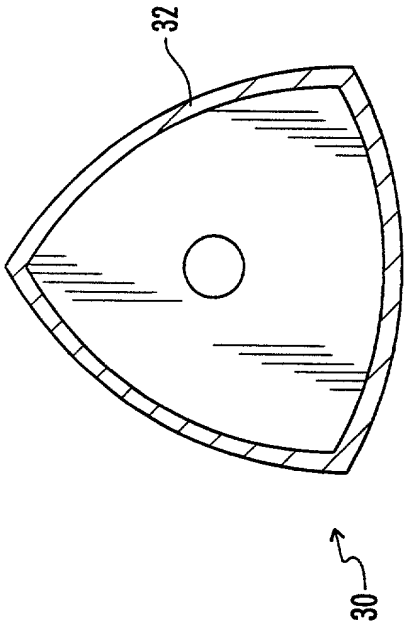


FIG. 5

+

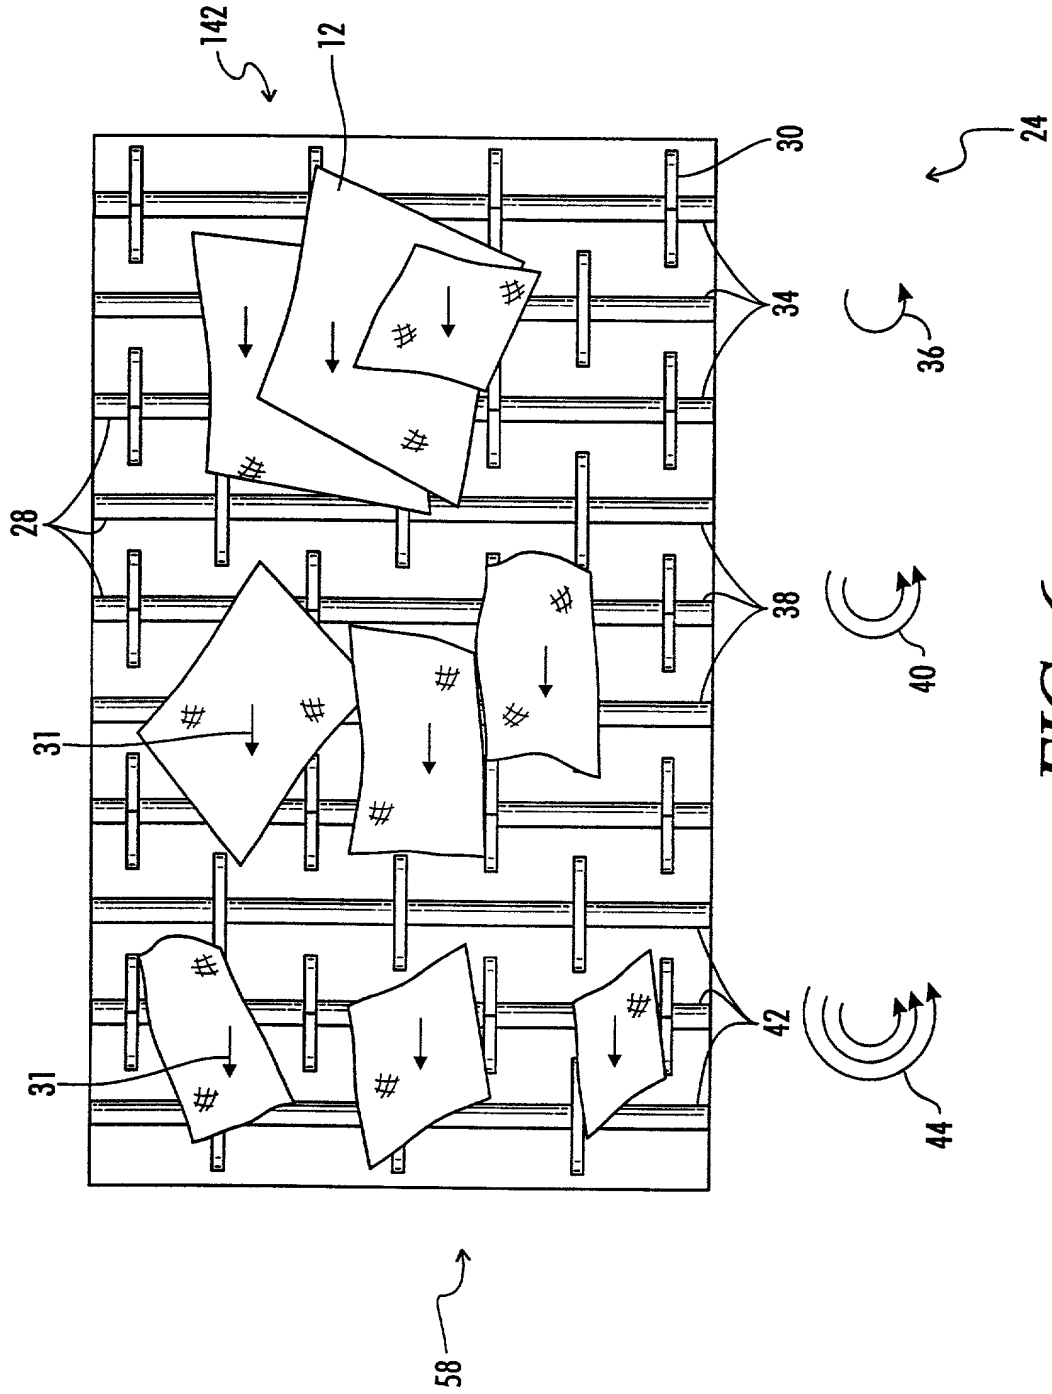


FIG. 6

+

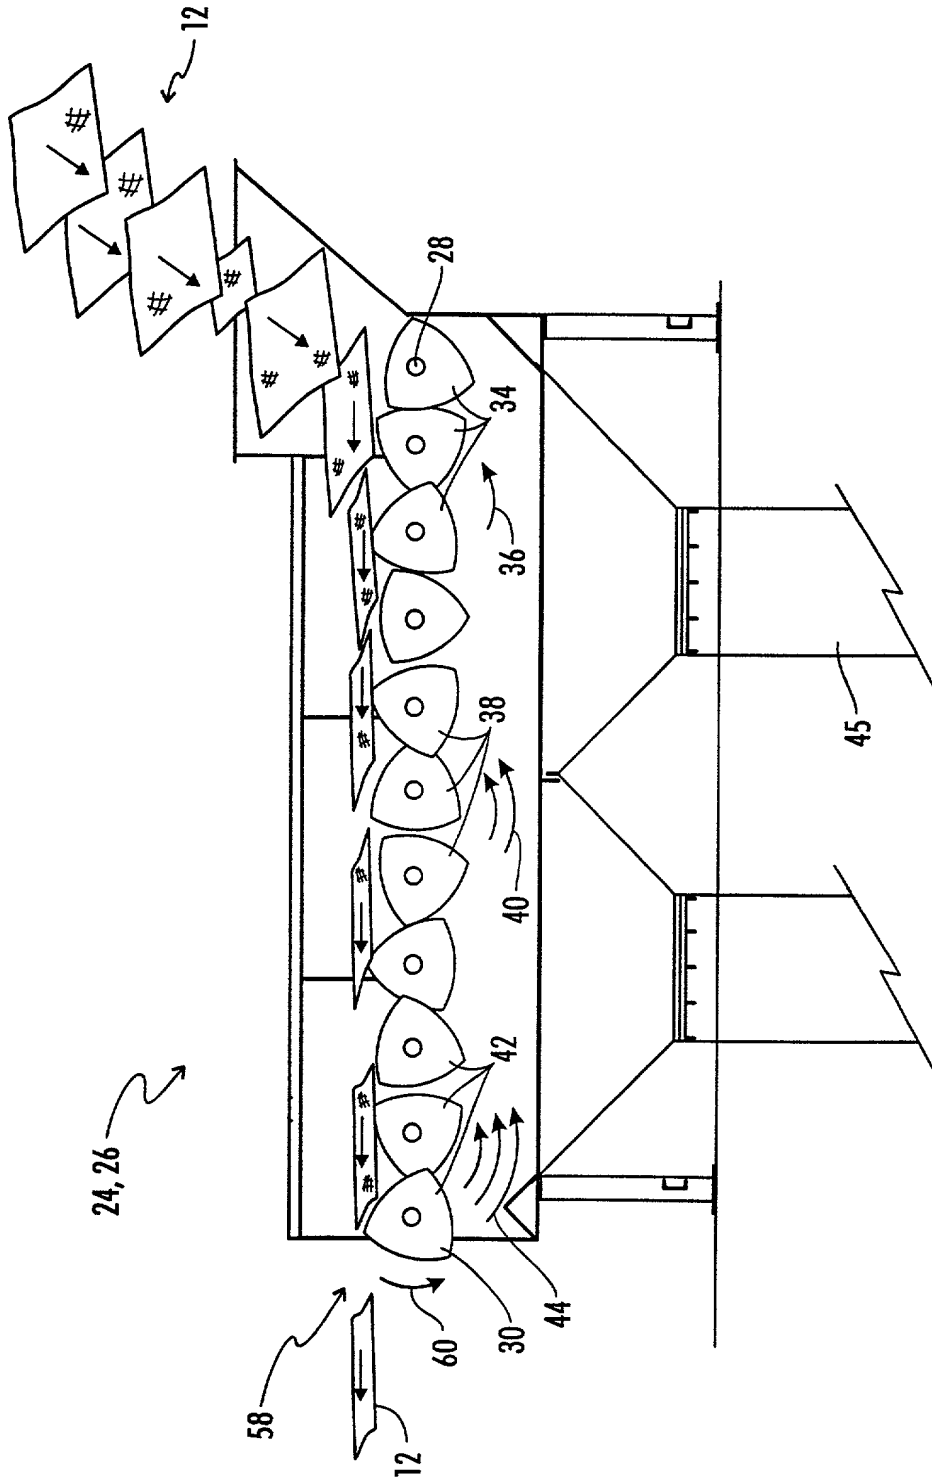


FIG. 7

+

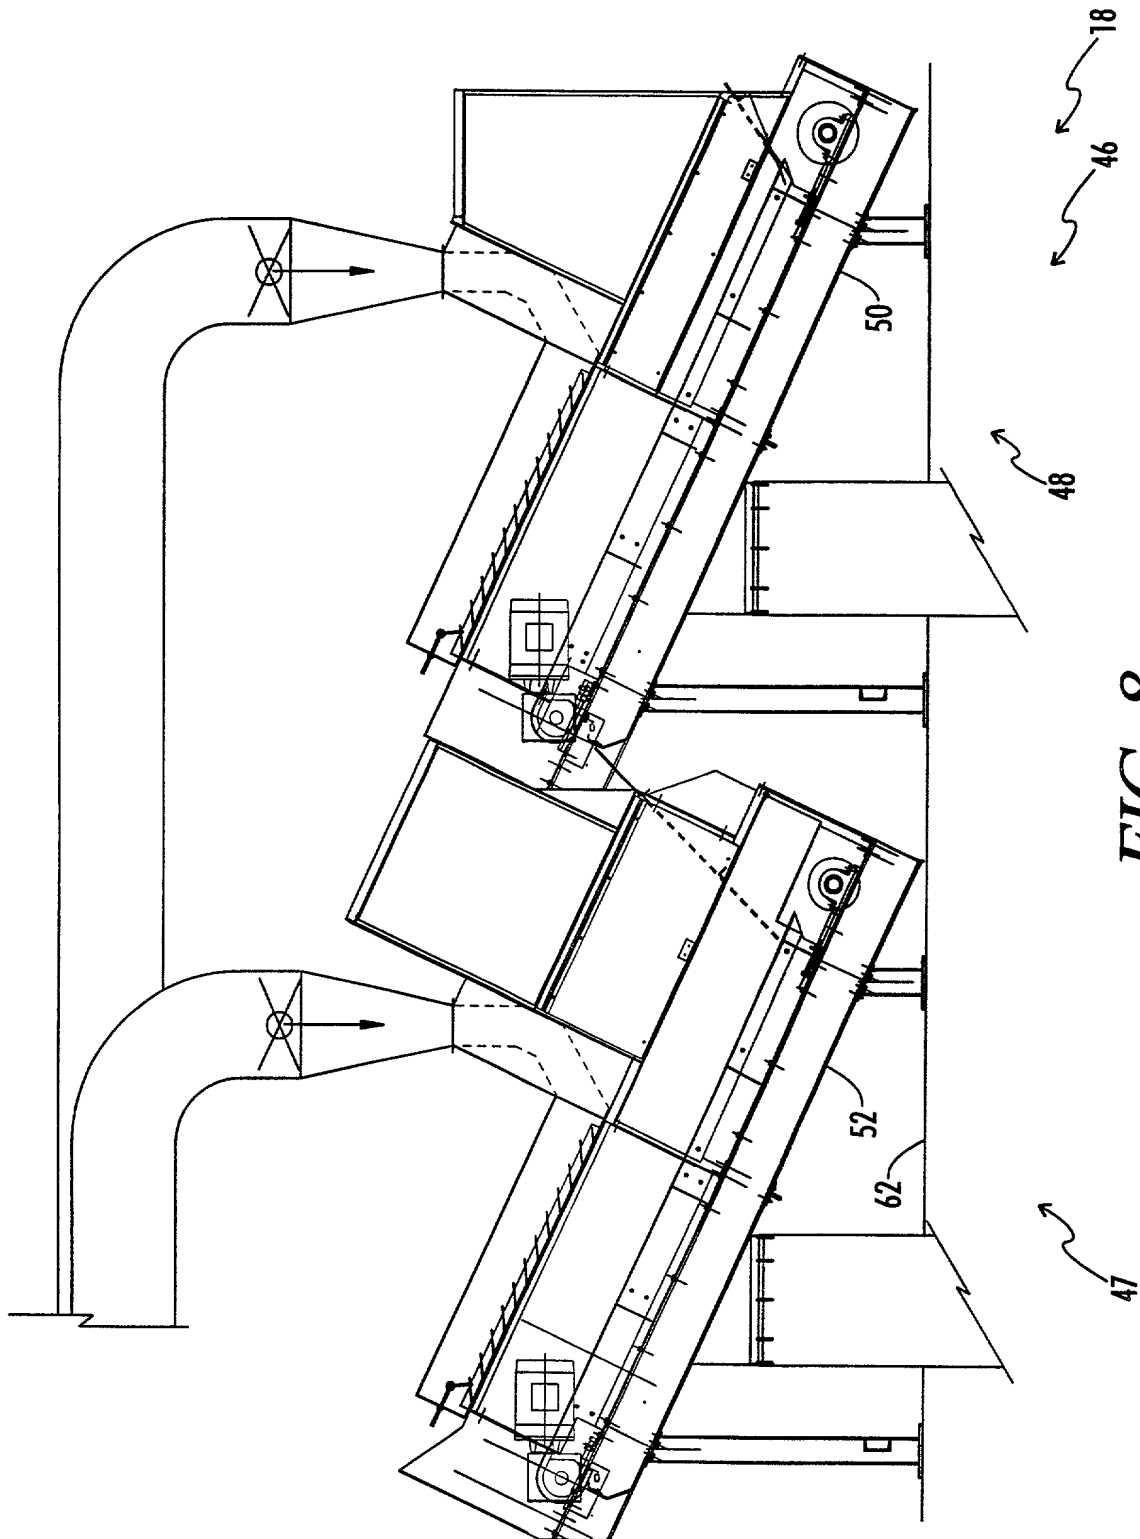


FIG. 8

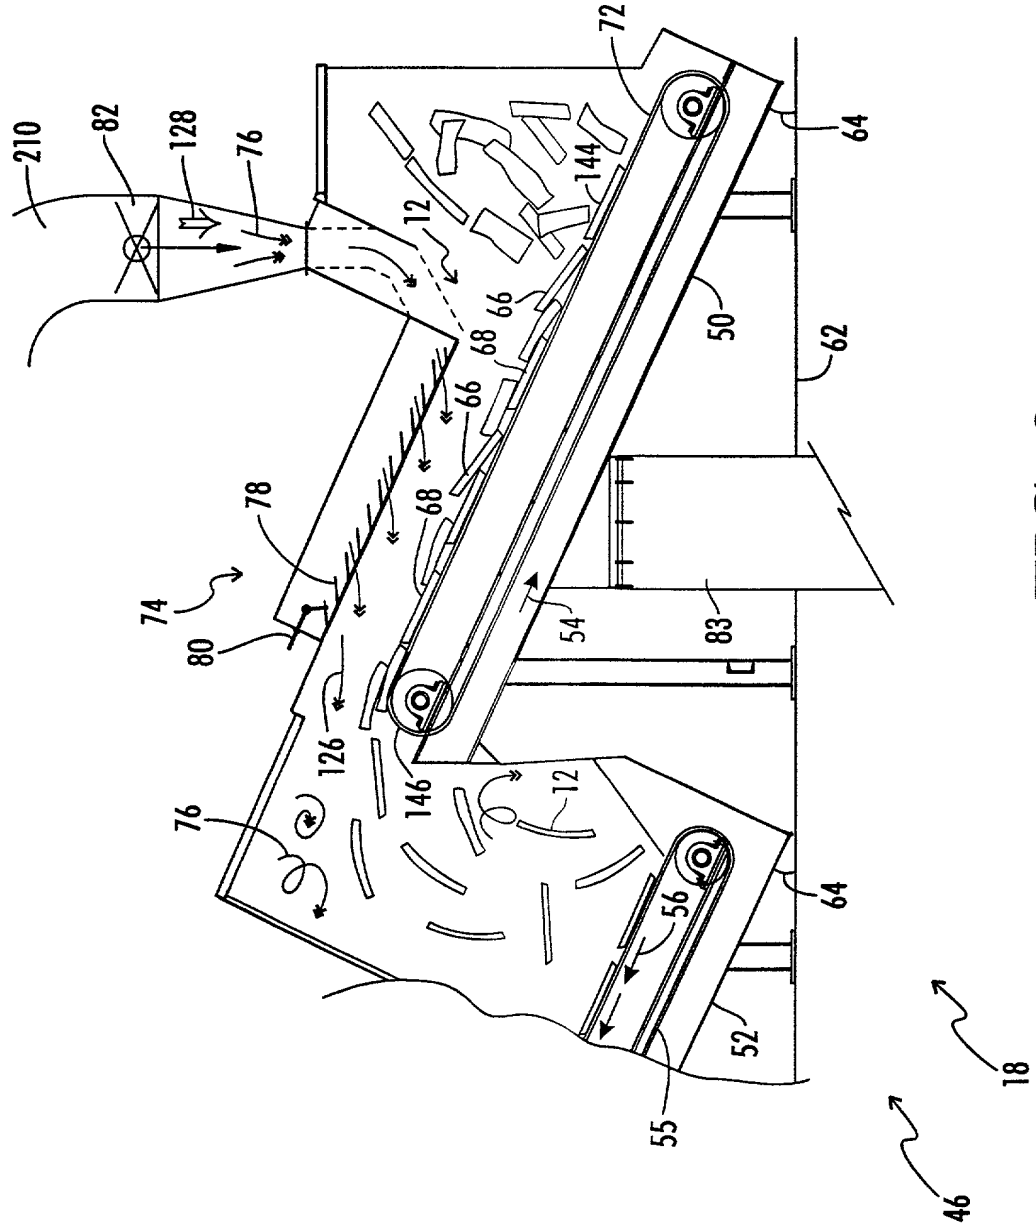


FIG. 9


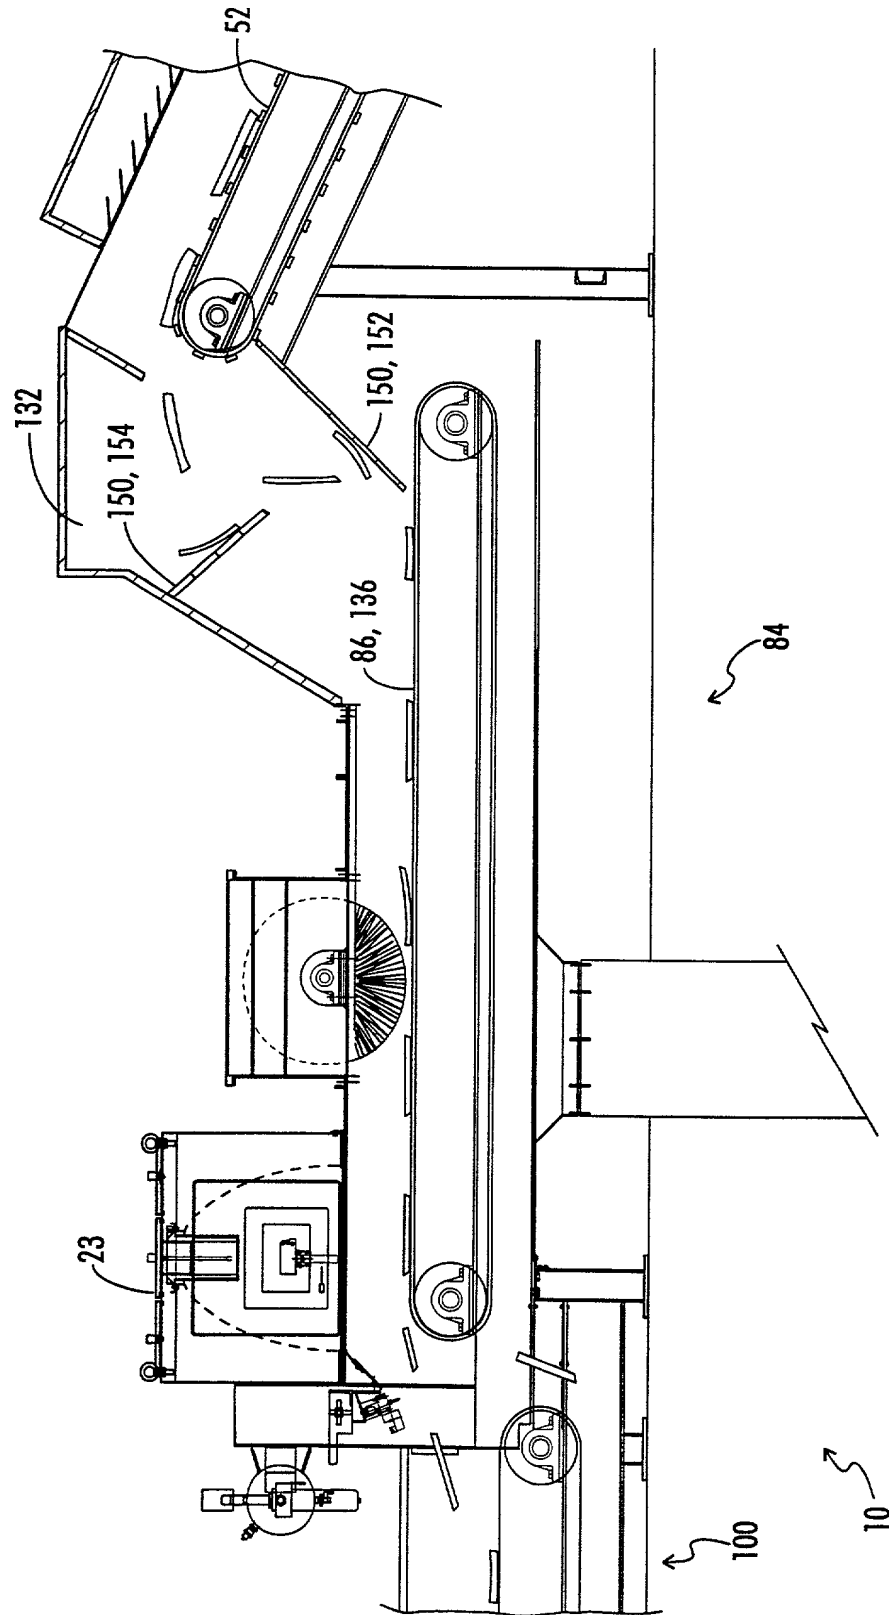


FIG. 10

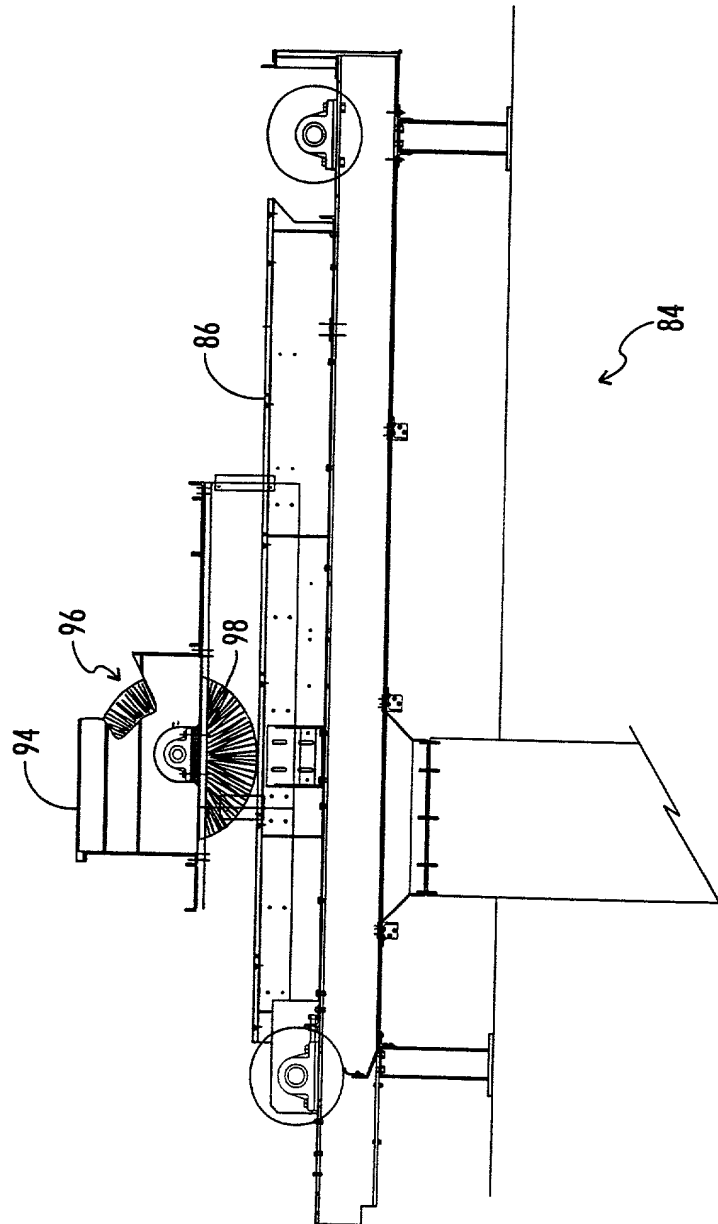

+

+



FIG. 12

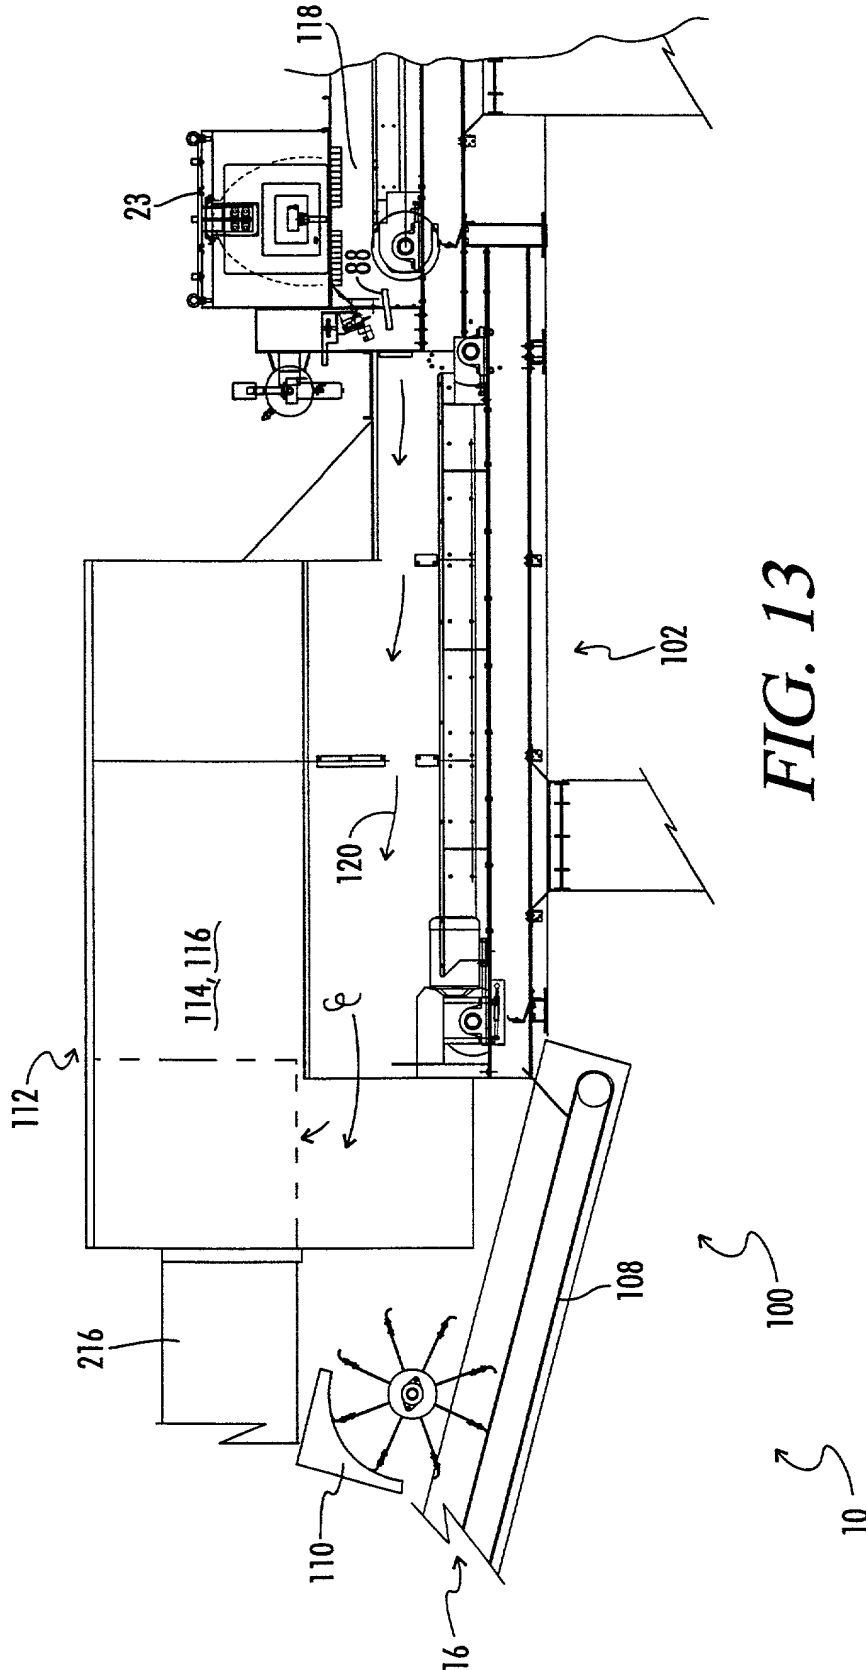


FIG. 13

FIG. 13 is a schematic diagram of a mechanical assembly 100. The assembly includes a base 102 with a horizontal track 108. A carriage 110 is mounted on the track and features a fan-like component 116. A vertical support 216 is positioned behind the carriage. A large rectangular housing 112 is situated to the right of the carriage, with internal components 114 and 116. A dashed line indicates a cross-section through the housing. A vertical shaft 120 extends from the carriage area through the housing. At the top of the shaft, a complex mechanism 23 is shown, which includes a motor or actuator 88 and a lever arm 118. The entire assembly is labeled 100, and a reference numeral 10 is shown at the bottom right.

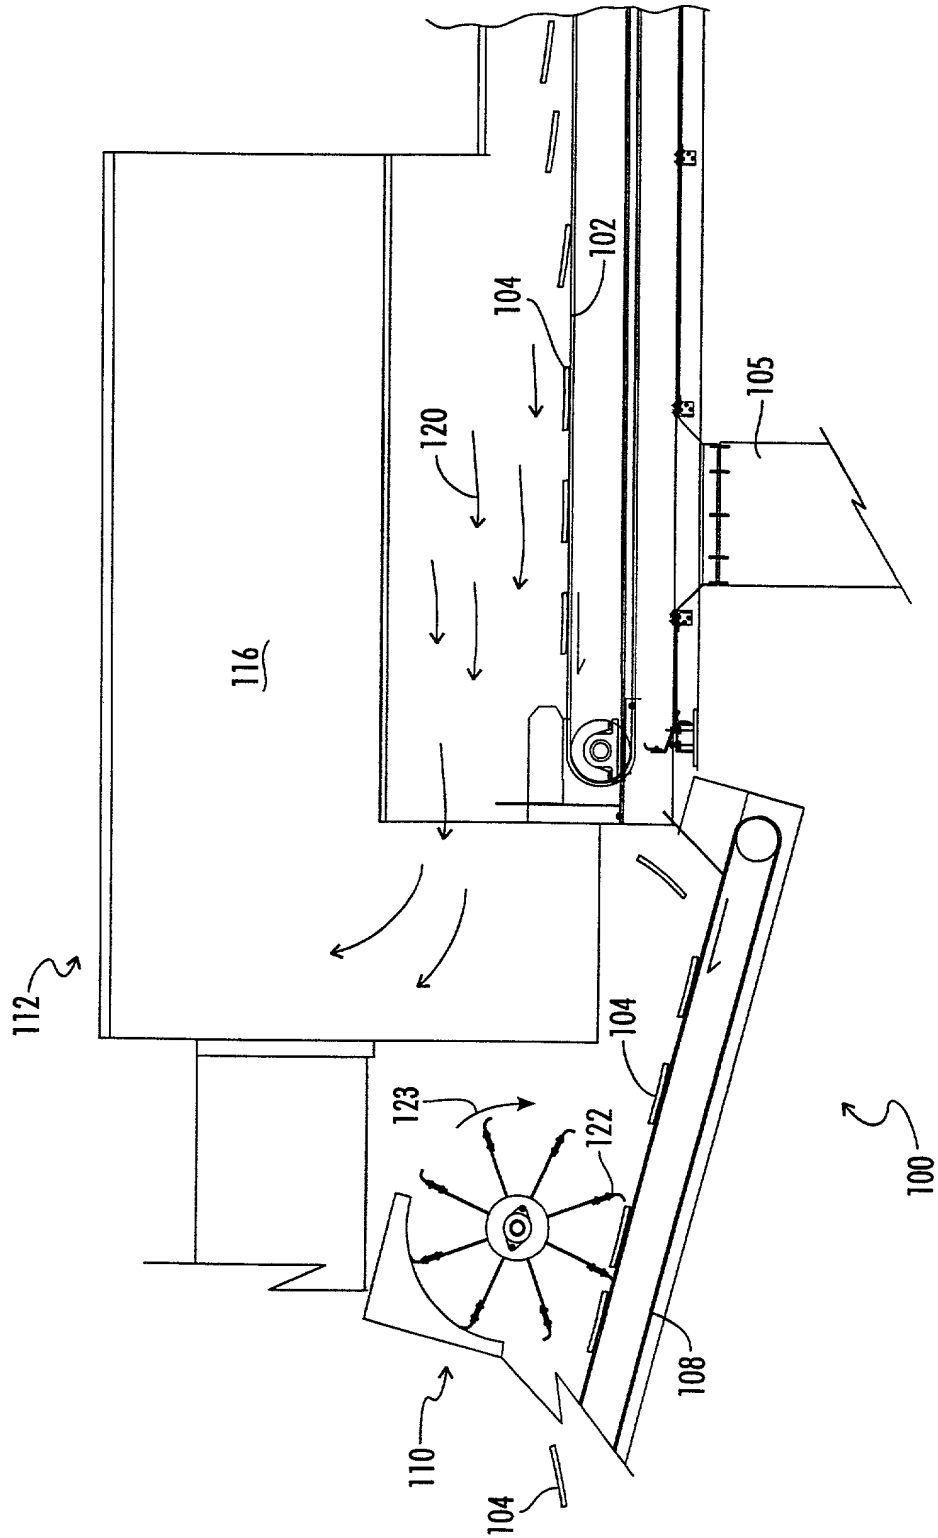


FIG. 14

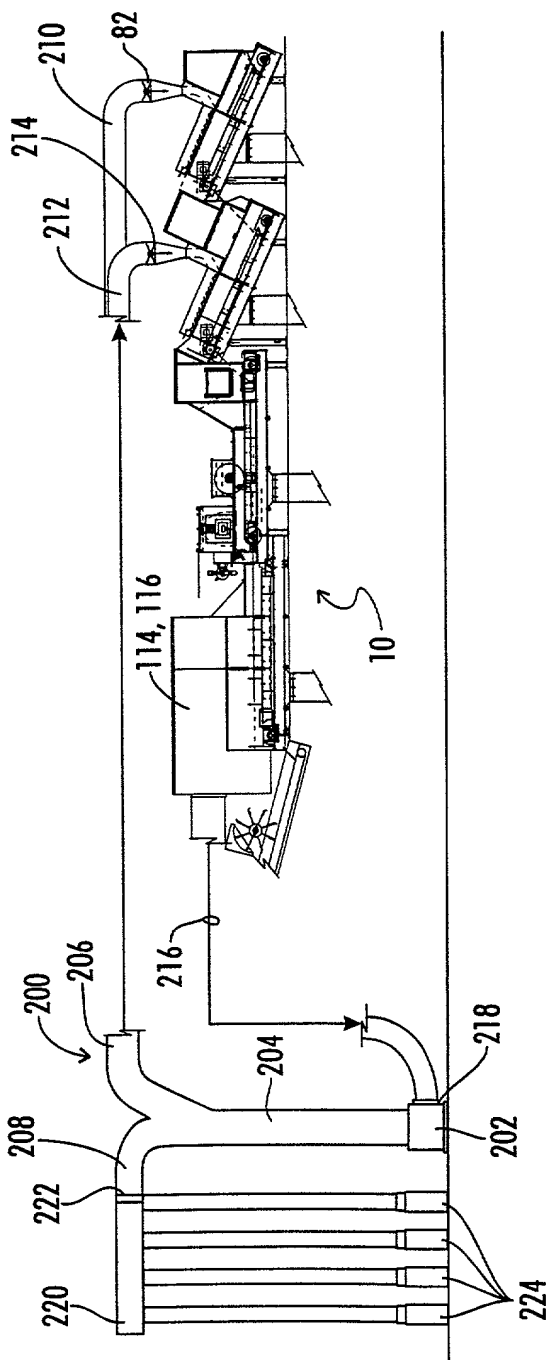


FIG. 15